



DWT TOUGH-EZ TILES

Equipped with a pressure sensitive adhesive backing, the Tough-EZ Tile is the quickest and easiest installed surface mount on the market!

The DWT Tough-EZ tile can be applied to both existing asphalt and concrete surfaces. For installation, simply grind and clean the surface, apply primer to the cleaned surface (allow 3 minutes to cure), then “peel and stick” the tile into place. Because this application relies on pressure sensitive adhesive, you must apply pressure on and between the truncated domes of the tile. To finish, run a bead of adhesive/sealant around tile perimeter to complete the installation.



INSTALLATION INSTRUCTIONS



1. OUTLINE LOCATION OF TILE ON SURFACE



2. GRIND SURFACE



3. CLEAN WITH BROOM OR BLOWER



4. APPLY PRIMER



5. REMOVE PAPER BACKING



6. SET TILE IN PLACE




7. APPLY EVEN PRESSURE



8. APPLY PERIMETER SEAL



Do not apply primer OR cut tile (Saw, grind, sand) without the use of a NIOSH approved cartridge respirator suitable to keep airborne mists and vapor concentrations below the time weighted threshold limit values. When using in poorly ventilated and confined spaces, use fresh-air supplying respirator or a self contained breathing apparatus.



DWT PRESSURE ROLLER

The DWT Pressure Roller is used to apply pressure to the top of the tile domes as well as in between. Applying even pressure insures a good installation for the Tough-EZ surface mount tiles.

DWT SPECIFICATIONS

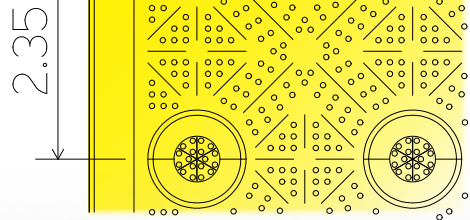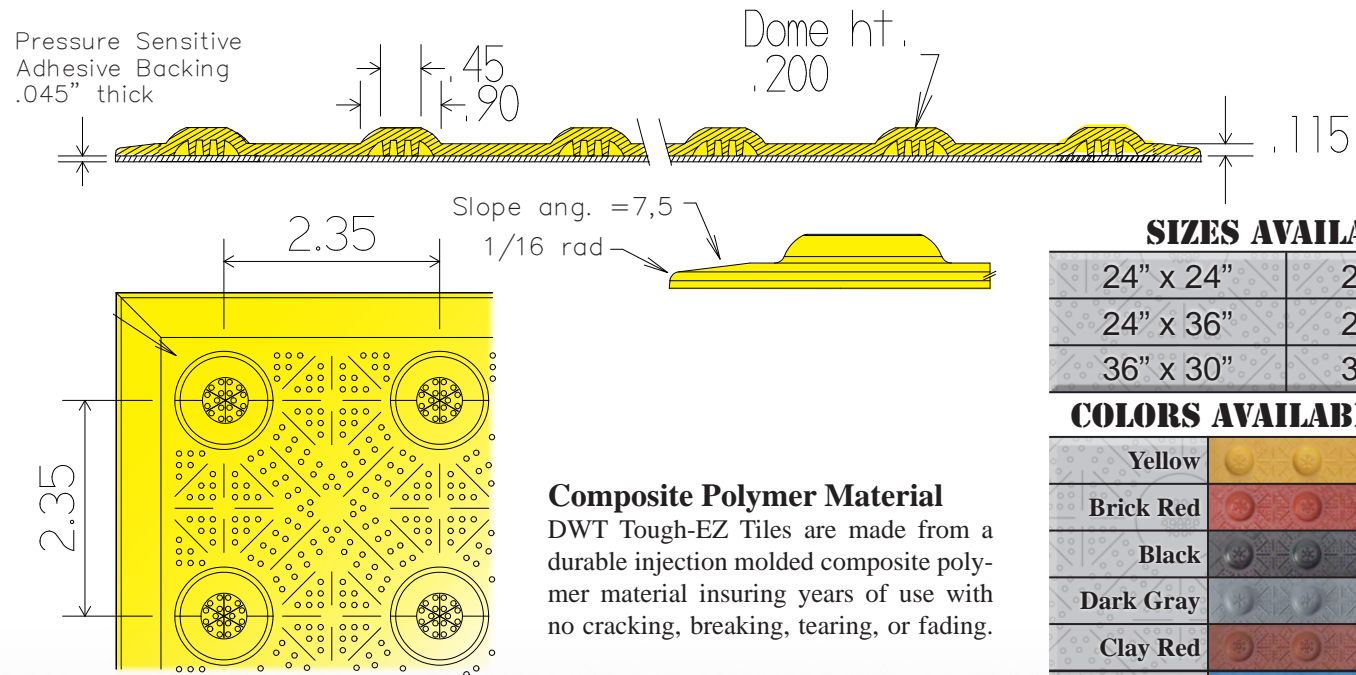

High Visibility Color

DWT color is homogenous throughout the tile and is available in six colors that conform to ADAAG specifications for color contrast.

Composite Polymer Material

DWT Tough-EZ Tiles are made from a durable injection molded composite polymer material insuring years of use with no cracking, breaking, tearing, or fading.

SIZES AVAILABLE

24" x 24"	24" x 48"
24" x 36"	24" x 60"
36" x 30"	36" x 48"

COLORS AVAILABLE FEDERAL

Yellow		33538
Brick Red		22144
Black		17038
Dark Gray		36118
Clay Red		20109
Blue		15187

Custom colors available as a special order with a minimum quantity of 200 units

