



# Jawless Immobilizers

APPLICATION/USE: Proven **Heavy Duty**, unattended, on/off-street, municipal, campus, private, corporate and anti-theft applications.

## FEATURES MITI'S UNIQUE PATENTED RHINO "HOOK-LOC" (JAWLESS) ATTACHMENT SYSTEM

**Domed HRV Series "Hook-Loc"** models feature one-piece unitized welded steel construction, are light in weight and install in 30-45 seconds. No assembly required. The proven Rhino **HRV** Series features the latest technology in immobilizer attachment systems. The reinforced frame design eliminates the possibility of damage, scratching or marring of the vehicle's wheel rim edge (flange). The **"Hook-Loc"** attachment system is found only on Rhino Immobilizers.

- Attachment by means of wheel rim edges (flanges) through attachment jaws is totally eliminated with the Rhino **HRV** series immobilizers. The inner **"Hook-Loc"** arm, with pressure stop affixed to the outer side, indexes quickly within the inner wheel's cavity between the wheel's backing plate or wheel drum.
- An assist spring aids in the installation of the immobilizer by holding the inner **"Hook-Loc"** arm against the inner wheel, where it is indexed between the wheel and brake backing plate.
- Rotating outer arm tire stop provides superior resistance for preventing side-to-side movement and forcible removal or drive-away. It also allows for attachment to small, medium and oversized tires and wheels.
- Bi-directional stand design allows the immobilizer to be attached to any outer dual wheel – front, rear, left or right side. Unique to Rhino.
- Each unit shipped with a Secur-Key and package of immobilization tags.

## DOMED HRV SERIES

**6** Telescoping dome assembly with protective beading prevents removal of the wheel.

**7** Baked-on environmentally safe safety orange powder coating provides high visibility and superior rust protection.

**8** Deep dish dome provides space for protruding hubs. Prevents access to lug nuts.



HRV12


MADE IN USA



HRV14

**10** MITI-Rhino's stainless steel Secur-Bolt-Key system provides secure immobilizer attachment by means of a hardened steel-plated 3/4" custom machined bolt with 3/4" stainless steel welded nut, encapsulated in a 1 1/2" welded steel tube with 1/2" holes provided for optional padlock (recommended) and padlock cover, providing a three-tier high security locking system. When tightened, the secur-bolt applies pressure against the outer end of the inner pivotal arm, rotating it inward until the arm indexes into the wheel's cavity. Then the inward pressure is reversed at the stop, driving outer affixed and telescoping dome assembly against the outer wheel for a positive vice-like attachment.

NOTE: 14/15" domed wheel covers are ideal for large diameter wheels, 12" are best for general use on all diameters, and 10" are ideal for extremely small diameter wheels. 15" are primarily used for municipal applications.

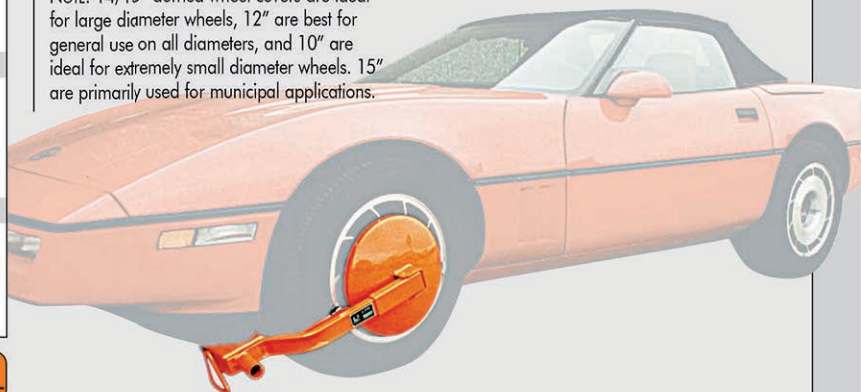

DOMED HRV SERIES MODELS "HOOK-LOC"				
FITS USA, foreign, subcompact to full size, light trucks, and vehicles with extra wide wheels.				
DOMED WHEEL COVERS 10" (25.40cm) 12" (30.48cm) 14" (35.56cm) 15" (40.24cm)				
HRV-10 WHEEL/TIRE 2 to 17 1/2" (5.08 - 44.45cm) WIDE X 12 to 24" (30.48 - 60.96cm) DIAMETER	(WIDTH)	(LENGTH)	(HEIGHT)	(WEIGHT)
UNIT SIZE	13 1/4" (33.66cm)	x 31 1/2" (80.01cm)	x 10" (25.40cm)	23 1/4 lbs (10.55kg)
PACKAGED 1 PER BOX	13" (33.02cm)	x 31 1/2" (80.01cm)	x 12" (30.48cm)	30 lbs (13.61kg)
PACKAGED 2 PER BOX	13" (33.02cm)	x 31 1/2" (80.01cm)	x 12" (30.48cm)	53 lbs (24.04kg)
HRV-12 WHEEL/TIRE 2 to 17 1/2" (5.08 - 44.45cm) WIDE X 12 to 24" (30.48 - 60.96cm) DIAMETER	(WIDTH)	(LENGTH)	(HEIGHT)	(WEIGHT)
UNIT SIZE	13 1/4" (33.66cm)	x 32 1/2" (76.84cm)	x 12" (30.48cm)	24 1/2 lbs (11.11kg)
PACKAGED 1 PER BOX	13" (33.02cm)	x 31 1/2" (80.01cm)	x 12" (30.48cm)	27 lbs (12.25kg)
PACKAGED 2 PER BOX	13" (33.02cm)	x 31 1/2" (80.01cm)	x 12" (30.48cm)	56 lbs (25.40kg)
HRV-14 WHEEL/TIRE 2 to 17 1/2" (5.08 - 44.45cm) WIDE X 12 to 24" (30.48 - 60.96cm) DIAMETER	(WIDTH)	(LENGTH)	(HEIGHT)	(WEIGHT)
UNIT SIZE	13 1/4" (33.66cm)	x 35" (82.55cm)	x 14" (35.36cm)	25 1/4 lbs (11.45kg)
PACKAGED 1 PER BOX	13" (33.02cm)	x 31 1/2" (80.01cm)	x 12" (30.48cm)	32 lbs (14.51kg)
PACKAGED 2 PER BOX	13" (33.02cm)	x 31 1/2" (80.01cm)	x 15" (38.10cm)	57 lbs (25.85kg)
HRV-15 WHEEL/TIRE 2 to 17 1/2" (5.08 - 44.45cm) WIDE X 12 to 24" (30.48 - 60.96cm) DIAMETER	(WIDTH)	(LENGTH)	(HEIGHT)	(WEIGHT)
UNIT SIZE	13 1/4" (33.66cm)	x 35 1/2" (85.09cm)	x 16" (40.64cm)	26 1/4 lbs (11.91kg)
PACKAGED 1 PER BOX	13" (33.02cm)	x 31 1/2" (80.01cm)	x 12" (30.48cm)	29 lbs (13.15kg)
PACKAGED 2 PER BOX	13" (33.02cm)	x 31 1/2" (80.01cm)	x 15" (38.10cm)	61 lbs (27.67kg)

US PATENT 5,865,048

ORDER FORM  
PAGE 16-17

**Immobilize to Deter Parking Violations**

