


# DCD Design & Manufacturing Ltd.

## SERIES 23000 WIRE ROPE SLING

1. The wire rope sling is intended to allow multiple pulls of utility product.

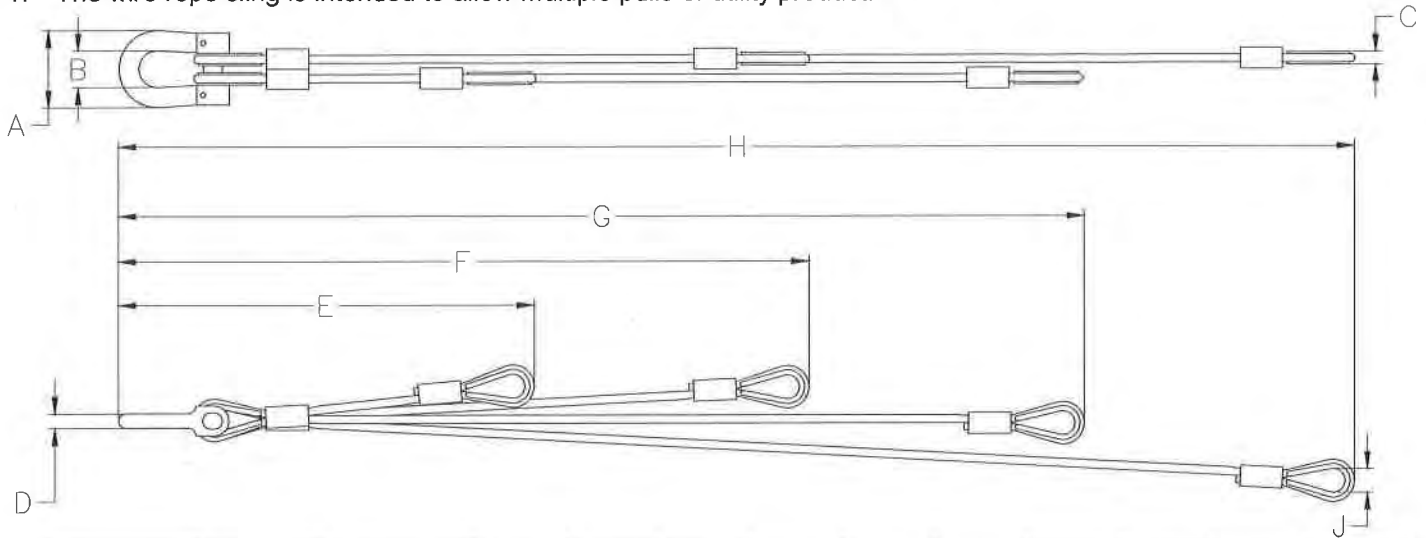

Part Number	Sling Safe Working Limit	Leg Safe Working Limit	A	B	C	D	E	F	G	H	J	Net Weight
23125-020	1,300 lb 5.8 kN	650 lb 2.9 kN	1-11/16" 43 mm	13/16" 21 mm	5/16" 8 mm	5/16" 8 mm	8" 200 mm	12" 300 mm	N/A	N/A	11/16" 17 mm	0.32 lb 0.15 kg
23125-030	1,950 lb 8.7 kN	650 lb 2.9 kN	1-11/16" 43 mm	13/16" 21 mm	5/16" 8 mm	5/16" 8 mm	8" 200 mm	12" 300 mm	16" 400 mm	N/A	11/16" 17 mm	0.58 lb 0.26 kg
23125-040	2,600 lb 11 kN	650 lb 2.9 kN	1-11/16" 43 mm	13/16" 21 mm	5/16" 8 mm	5/16" 8 mm	8" 200 mm	12" 300 mm	16" 400 mm	20" 500 mm	11/16" 17 mm	0.66 lb 0.30 kg
23250-020	4,600 lb 20 kN	2,300 lb 10 kN	2-1/4" 57 mm	1-1/16" 27 mm	7/16" 11 mm	7/16" 11 mm	12" 300 mm	20" 500 mm	N/A	N/A	11/16" 17 mm	1.3 lb 0.59 kg
23250-030	6,900 lb 31 kN	2,300 lb 10 kN	2-1/4" 57 mm	1-1/16" 27 mm	7/16" 11 mm	7/16" 11 mm	12" 300 mm	20" 500 mm	28" 700 mm	N/A	11/16" 17 mm	1.5 lb 0.68 kg
23250-040	7,100 lb 32 kN	2,300 lb 10 kN	2-1/4" 57 mm	1-1/16" 27 mm	7/16" 11 mm	7/16" 11 mm	12" 300 mm	20" 500 mm	28" 700 mm	36" 900 mm	11/16" 17 mm	1.9 lb 0.86 kg
23375-020	9,600 lb 43 kN	4,800 lb 21 kN	2-13/16" 71 mm	1-5/16" 33 mm	9/16" 14 mm	9/16" 14 mm	18" 450 mm	28" 700 mm	N/A	N/A	15/16" 24 mm	3.0 lb 1.4 kg
23375-030	12,000 lb 54 kN	4,800 lb 21 kN	2-13/16" 71 mm	1-5/16" 33 mm	9/16" 14 mm	9/16" 14 mm	18" 450 mm	28" 700 mm	38" 950 mm	N/A	15/16" 24 mm	3.9 lb 1.8 kg
23375-040	18,000 lb 81 kN	4,800 lb 21 kN	3-1/2" 89 mm	1-5/8" 41 mm	9/16" 14 mm	11/16" 17 mm	18" 450 mm	28" 700 mm	38" 950 mm	48" 1200 mm	15/16" 24 mm	6.0 lb 2.7 kg
23375-050	18,000 lb 85 kN	4,800 lb 21 kN	3-1/2" 89 mm	1-5/8" 41 mm	9/16" 14 mm	11/16" 17 mm	18" 450 mm	28" (x2) 700 mm	38" 950 mm	48" 1200 mm	15/16" 24 mm	6.9 lb 3.1 kg
23500-020	13,800 lb 61 kN	6,900 lb 31 kN	3-1/2" 89 mm	1-5/8" 41 mm	3/4" 19 mm	11/16" 17 mm	28" 700 mm	38" 950 mm	N/A	N/A	1" 25 mm	6.9 lb 3.1 kg
23500-030	20,700 lb 92 kN	6,900 lb 31 kN	3-1/2" 89 mm	1-5/8" 41 mm	3/4" 19 mm	11/16" 17 mm	28" 700 mm	38" 950 mm	48" 1200 mm	N/A	1" 25 mm	8.4 lb 3.8 kg
23500-040	28,300 lb 128 kN	6,900 lb 31 kN	3-15/16" 100 mm	1-15/16" 49 mm	3/4" 19 mm	13/16" 21 mm	28" 700 mm	38" 950 mm	48" 1200 mm	58" 1450 mm	1" 25 mm	13 lb 5.9 kg

Dimensions and weights subject to change without notice.

The **Safe Working Limit** is calculated using a 3:1 safety factor based on the ultimate load.

The **Ultimate Load** is the tensile load required to separate the sling into two or more parts.

11/28/2017