

Mini-Grip™

The Mini-Grip™ pulling eye is reusable and has a lug style head that will attach directly into a line swivel or other type of connector. This pulling eye is zinc plated for corrosion and has three set screws that clamp directly onto the cable conductor. It is suitable for smaller cables with conductors having seven strands or less.

Note: These pulling eyes should always be used with a Line Swivel (00505 series).



Part No.	Maximum Cable Size	Maximum Core Diameter	Body Diameter	Weight
24500-343	4 to 3 AWG	0.33"	3/4"	0.30 lb
24500-406	2 to 1/0 AWG	0.39"	7/8"	0.37 lb
24500-562	2/0 to 4/0 AWG	0.55"	1"	0.44 lb


Pulling Harness

The purpose of this product is to allow single or multiple pulls at one time by attaching one or two cables to the one pulling harness. The harness legs are manufactured from aircraft quality galvanized wire rope while the connector end is manufactured from stainless steel.

The two leg units are staggered in length so the individual connections are not interfering with each other. The safety factor is based on equal pull on both legs.

The double leg harness is available in long or short configurations and each is supplied with one hex key and four set screws. The single harness is supplied with one hex key and two set screws. Both the hex key and the set screws are available separately.

Cable sizes that can be pulled with these harnesses are 2/0 to 4/0 AWG.

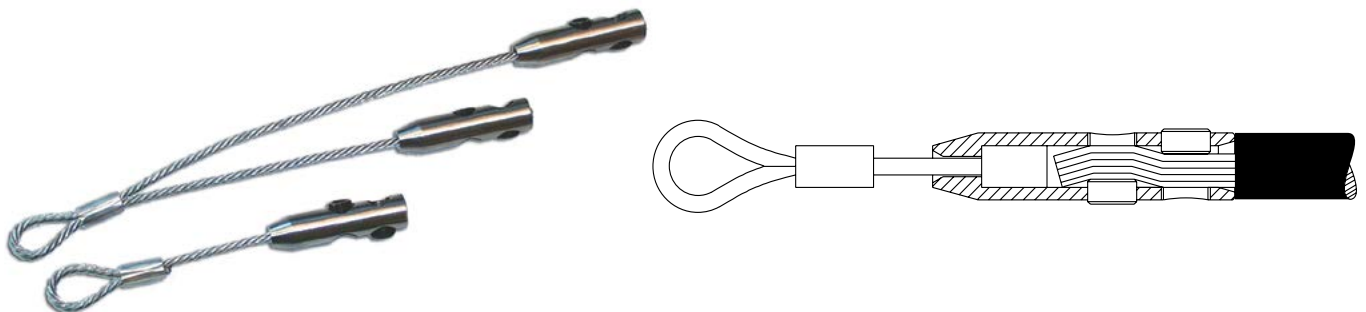

Part No.	Description	Wire Diameter	Number of Legs	3:1 Safe Working Load Leg Capacity	3:1 Safe Working Load Total Capacity	Weight
25000-010	Single Leg	1/4"	1	2,300 lb	2,300 lb	1.00 lb
25000-020	Double Leg - Short	1/4"	2	2,300 lb	4,600 lb	1.70 lb
25000-021	Double Leg - Long	1/4"	2	2,300 lb	4,600 lb	2.00 lb
90000-166	Set Screw	-	-	-	-	0.10 lb
00101-375	Hex Key	-	-	-	-	0.28 lb