

Meter Box Puller

Designed for use by power utilities or contractors who are pulling new residential service lines through conduit. The head of the Meter Box Puller fits snugly in the meter enclosure, while the handle is strapped to the PVC conduit that goes from the ground to the meter box.

During the pull, the sheaves in the head make the pull easier, while the handle presses against the PVC conduit helping to keep the conduit and the meter box from pulling out from the wall.



Part No.	3:1 Safe Working Load	Nominal PVC Conduit Diameter	Weight
32460-000	1,250 lb	3" to 4"	8.1 lb
32460-300	1,250 lb	3"	7.8 lb



Flexible Cable Guides

The DCD Flexible Cable Guide comes in 5' or 10' lengths. Custom lengths are also available. At each end there is a polyurethane coupling that can be used for attaching two lengths together and for attaching the duct adapter and the cable entry cone.

There are three different diameters or sizes of flexible guides. The 4" size has adapters suitable for 2", 3" and 4" duct sizes, the 5" size only fits 5" duct, and the larger 6" unit has adapters suitable for 4", 5", and 6" ducting.

Each duct adapter is fitted with a spray nozzle suitable for the DCD Tube-Lube® 326. There is one half of a quick-disconnect coupling attached to the nozzle that will direct the lubricant onto the cable as it is fed into the ducting.

Like the end fittings, the duct adapters are made from polyurethane and are also sold separately.

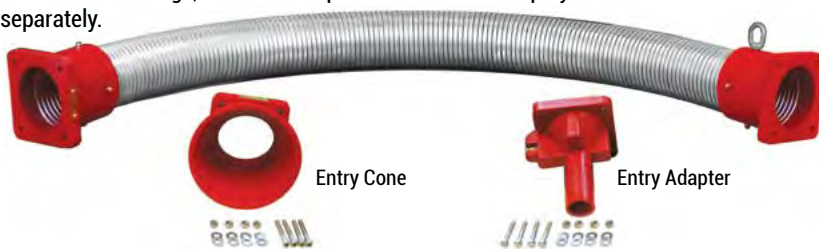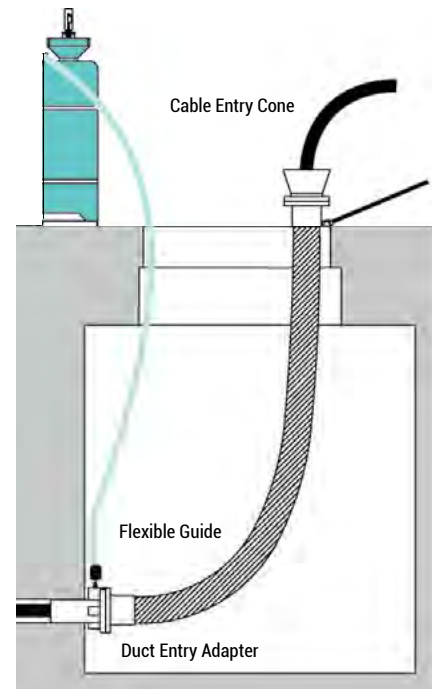

Flexible Guide Part No.	Diameter	Length	Cable Entry Cone Part No.
32600-405	4"	5'	32610-300
32600-410	4"	10'	32610-400
32600-505	5"	5'	32610-500
32600-510	5"	10'	
32600-605	6"	5'	32610-600
32600-610	6"	10'	

Duct Entry Adapter Part No.	Use with Flexible Guide Diameter	Nominal Duct Size
32620-420	4"	2"
32620-425	4"	2-1/2"
32620-430	4"	3"
32620-440	4"	4"
32620-550	5"	5"
32620-635	6"	3-1/2"
32620-640	6"	4"
32620-650	6"	5"
32620-660	6"	6"

Note: Contact Customer Service regarding custom lengths.