

# SPEED BUMPS, SPEED HUMPS & CAR STOPS

**PLASTICADE®**

Plasticade.com

- Resistant to weather, oil, salt, moisture, UV light, and temperature
- Will not warp, chip, or crack
- Never needs painting, durable striping
- 44,000 lbs./axle weight bearing capacity
- Flexible, conforms to surface contours
- Install on asphalt or concrete (hardware sold separately)
- Removable for road surface maintenance or snow plowing

## SPEED BUMPS



### Standard Speed Bump

- 2.5" High, 6' or 4' sections, made from recycled rubber
- Reflective yellow tape is embedded in the rubber, increases visibility
- Good for parking lots & slow roadways, reduces speeds 2-5 mph
- Cut with a utility knife if necessary
- Optional cat eye reflectors
- Dual bottom channels for drainage, protects wire, hose, or pipe
- End caps and hardware sold separately
- Made in the USA



### Premium Textured Speed Bump

- 2" High, 6' sections
- Use in heavy traffic areas on low speed roadways
- Reduces speeds 1-5 mph
- Textured, vulcanized rubber performs well in extreme temperatures
- Cat eye reflectors included for increased visibility at night
- 5 synthetic rubber yellow stripes, (EPDM) won't degrade
- Dual bottom channels for drainage - protects wire, hose, or pipe
- End caps and hardware sold separately

## SPEED HUMPS



### Standard Speed Hump

- 2.4" High, 24" sections, made from recycled rubber
- For traffic speeds 15 mph or less
- Gentler than speed bumps
  - good for heavy truck traffic areas
- Reflective stripes in yellow
- Dual bottom channels for drainage
  - protects wire, hose, or pipe to 3/4" dia.
- Made in the USA



### Premium Textured Speed Hump

- 2" High, 20" sections
- Use in heavy traffic areas
- Made of durable vulcanized rubber
  - performs well in extreme temperatures
- Textured surface helps with traction
- 6 rectangular yellow stripes per section
  - high visibility, non-wearing color

## PARKING STOPS



- Use in parking lots and garages
  - protects garage walls, delineates spaces
- Available in 6 foot or 4 foot lengths
- Maintenance Free
- High visibility at night
  - reflective stripes in yellow or white
- Made in the USA using recycled rubber



# SPEED BUMPS, SPEED HUMPS & CAR STOPS

## SPEED BUMPS

Low Profile & Standard End Cap



Premium End Cap




Channels for drainage or protect wire, hose, or pipe see spec. sheet for more information



Back View


## SPEED HUMPS

Standard Speed Hump

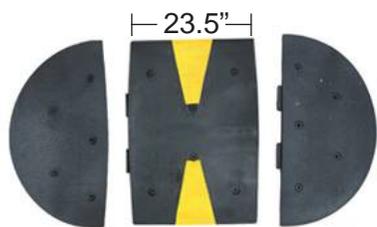


Female End Cap Center Section Male End Cap

Channels for drainage or protect wire, hose, or pipe to 3/4" dia.



Back View of Standard Speed Hump

Premium Speed Hump



Female End Cap Center Sections Male End Cap



Back View of Premium Speed Hump

## PARKING STOPS



Back View

## Speed Bump

Dimensions	4' 48"L x 12"W, 35 lbs. 6' 72"L x 12"W, 52 lbs.
End Cap	7"L x 12"W, 3.5 lbs.
Stripes	72" - 3 yellow 48" - 2 yellow
Cat Eyes	72" - 8 48" - 6
Installation Holes	72" - 4 48" - 3 End Cap - 2

## Premium Speed Bump

Dimensions	72"L x 12"W x 2"H, 52 lbs.
End Caps	6"L x 12"W x 2"H, 3.5 lbs.
Stripes	5 yellow
Cat Eyes	8
Installation Holes	4 End Cap - 1

## Standard Speed Hump

Dimensions	24"L x 36"W x 2.4"H, 52 lbs. connected length - 23.5"
End Caps	17.5"W x 36"W x 2.4"H, 23 lbs.
Stripes	2 yellow, per center section
Installation Holes	Center Section - 6 End Cap - 5

## Premium Speed Hump

Dimensions	20"L x 35"W x 2"H, 38 lbs. connected length - 19"
End Caps	10"L x 35"W x 2"H, 14 lbs.
Stripes	6 yellow, per center section
Installation Holes	Center Section - 6 End Cap - 3

## Parking Stops

Dimensions	72"L x 6"W x 4.5"H, 35.5 lbs. 48"L x 6"W x 4.5"H, 30 lbs.
Stripes	Yellow on black stop White on black or blue stop 72" - 4 on each side of stop 48" - 2 on each side (yellow)
Installation Holes	72" - 4 holes 48" - 3 holes

## Installation Hardware



- Concrete
  - 4 1/2" Lag Bolt with Washer & Shield for Speed Bumps & Speed Humps
  - 6" Lag Bolt with Washer & Shield for Car Stops
- Asphalt
  - 14" Re-bar Spike with Washer
- Epoxy can be used in addition to or as a replacement for the hardware in certain applications. See the installation instructions on our website.

Dimensions listed are nominal. For critical applications, a sample of current production parts should be evaluated.

**PLASTICADE®**

100 Howard Avenue  
Des Plaines, IL 60018  
phone (800) 772-0355  
info@plasticade.com

[Plasticade.com](http://Plasticade.com)