

# WORKS BARRICADE

## BREAKAWAY TYPE III WOOD & PSST BARRICADE TD2550 MODEL

CERTIFIED TO MEET THE CRASHWORTHY  
REQUIREMENTS OF NCHRP-350




NCHRP350 Compliant : WZ-85 & WZ-54  
MUTCD Compliant


Additional base styles for the TD2550 include the TD8400 Rubber Base and the PSST Base with Welded Socket.

- Type III barricades can be purchased as assembled units or component parts. Legs and boards can be purchased separately. All TD2550 barricade components are interchangeable.
- Breakaway Type III Works Barricade is available using Unistrut's Telespar tubing with breakaway base, bracket and detachable feet. Breakaway base yields to impacting vehicles. Easily detaches for transportation, assembly and storage.
- Barricade models 8 feet wide and greater can include an optional stabilizer bar between uprights for increased stability and an optional anti-rotational fitting.
- Rubber Base is made from 100% Post-Consumer Recycled Rubber. Easily assembled or removed for storage.

100% Recycled Rubber Base



Slip-Resistant and Stable !!!

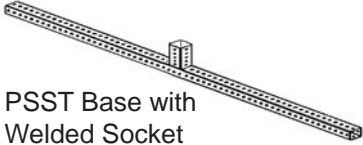


PSST Base with  
Welded Socket





TD2550 MODEL  
WORKS TYPE III WOOD & PSST BREAKAWAY BARRICADE  
SPECIFICATIONS

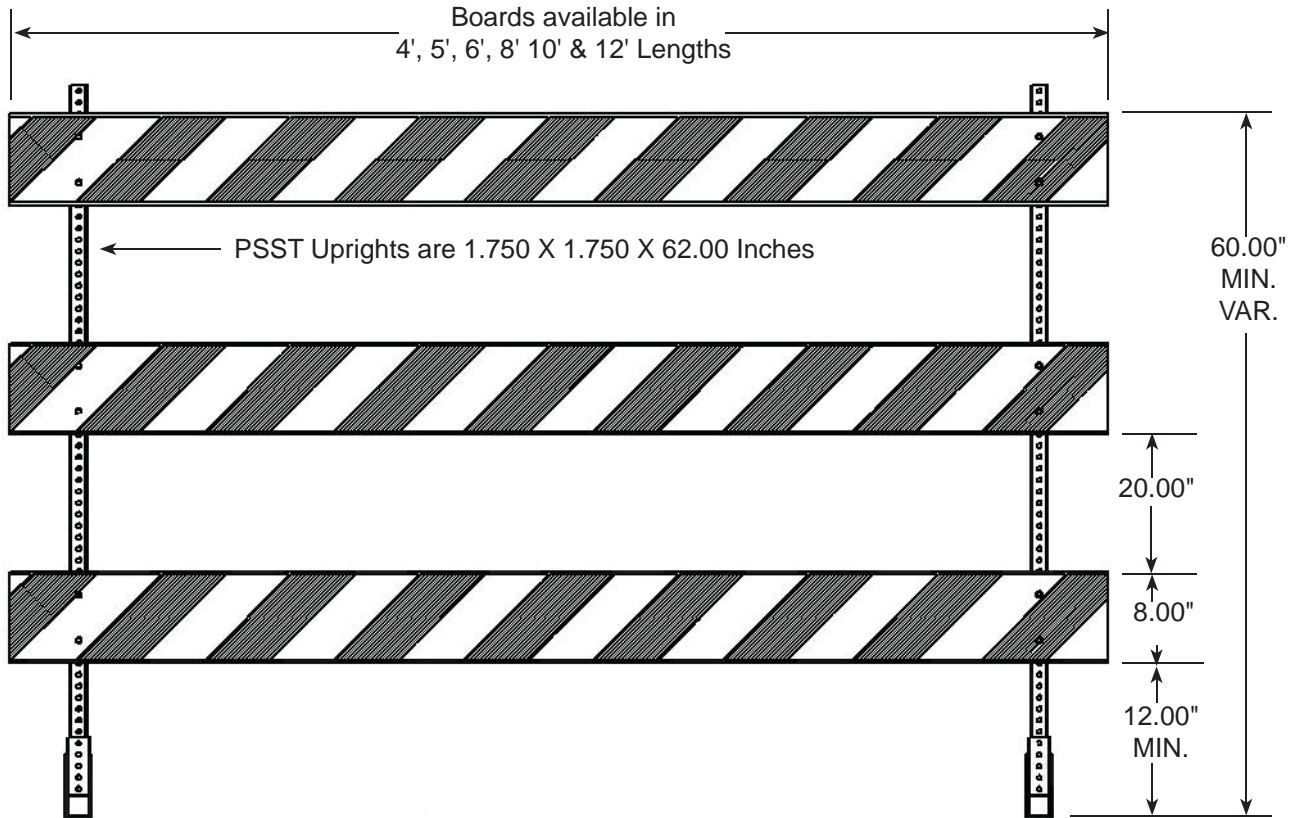

- 3/4" Plywood boards are painted white and can accommodate reflective sheeting on both sides of boards.
- "Breakaway" base design allows for safety release at impact.
- PSST uprights are available in 14 gauge steel. 14 gauge weight: 13.2 lbs.
- Panels available with Chevron, Left or Right Hand Sheeting. Divergent Striping or Same Direction Sheeting. All sheeting is ASTM 4956.01 compliant.
- In high wind areas please use sand bags.
- Accommodates two warning lights.

**PSST Breakaway Base**  
14 gauge weight: 13.2 lbs.

**TD8400 Base**  
Weight: 35 lbs.  
Height: 4 inches

**PSST Base with Welded Socket**  
14 gauge weight: 10.8 lbs.

