

# WORKS BARRICADE

## TYPE III PLASTIC & PSST BARRICADE

### TD2650 MODEL

CERTIFIED TO MEET THE CRASHWORTHY  
REQUIREMENTS OF NCHRP-350




NCHRP350 Compliant : WZ-85 & WZ-128  
MUTCD Compliant

Additional base styles for the TD2650 include the TD8400  
Rubber Base and the PSST Base with Welded Socket.


- Type III barricades can be purchased as assembled units or component parts. Legs and boards can be purchased separately. All TD2650 barricade components are interchangeable.
- Breakaway Type III Works Barricade is available using Unistrut's Telespar tubing with breakaway base, bracket and detachable feet. Breakaway base yields to impacting vehicles. Easily detaches for transportation, assembly and storage.
- Barricade models 8 feet wide and greater can include an optional stabilizer bar between uprights for increased stability and an optional anti-rotation fitting.
- Rubber Base is made from 100% Post-Consumer Recycled Rubber. Easily assembled or removed for storage.

100% Recycled Rubber Base

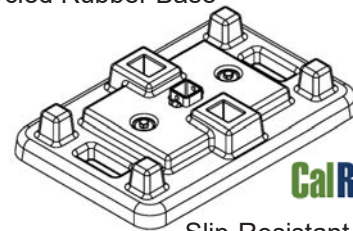

CalRecycle 

Slip-Resistant and Stable !!!

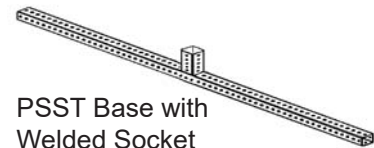

PSST Base with  
Welded Socket




**WCT**™  
**PRODUCTS**





TD2650 MODEL  
WORKS TYPE III PLASTIC BARRICADE  
SPECIFICATIONS

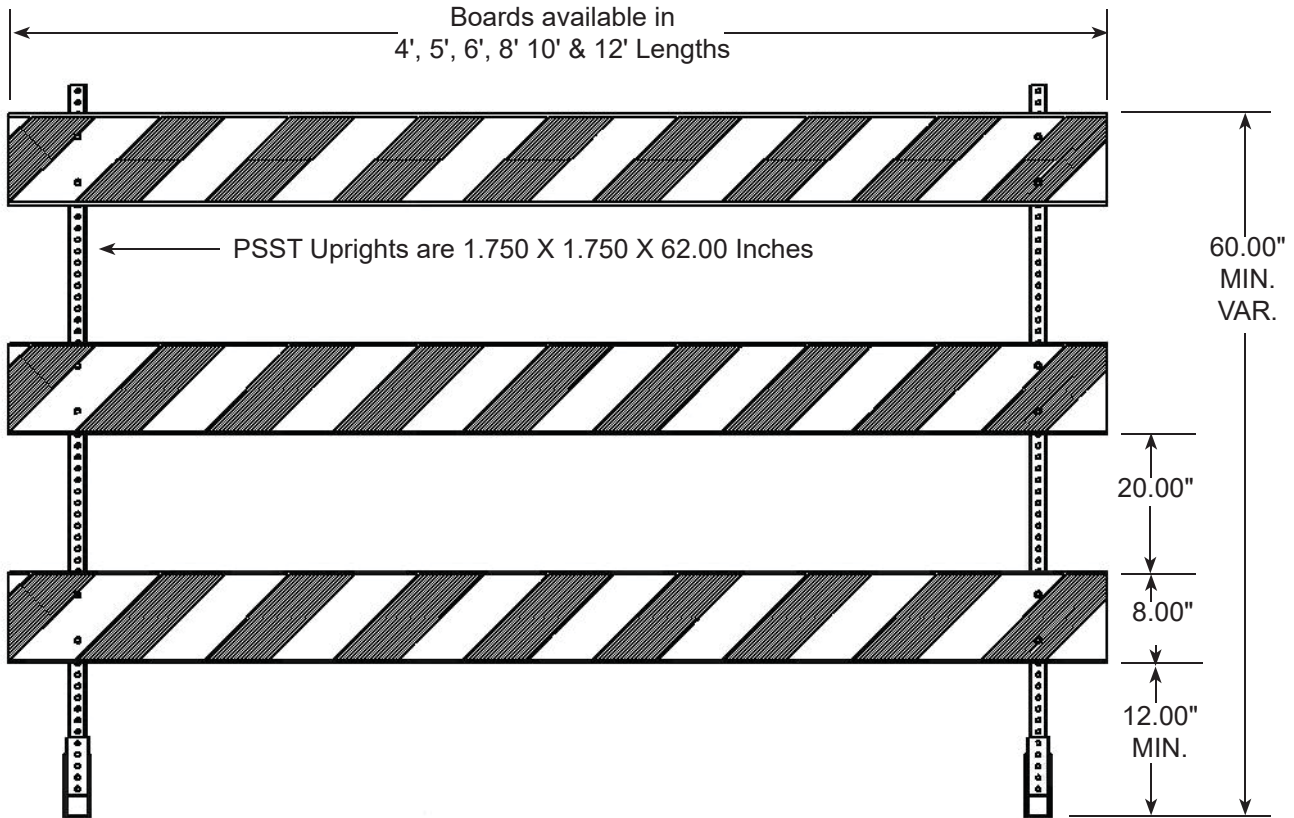

- HDPE Plastic boards can accommodate reflective sheeting on both sides of boards. 90% Recycled Content!!!
- Available with 1"x8" and 2"x8" White extruded boards. See TD4000 for additional information.
- PSST uprights are available in 12 or 14 gauge steel. 14 gauge uprights weigh 9 lbs.
- Panels available with Chevron, Left or Right Hand Sheeting, Divergent Striping or Same Direction Sheeting. All sheeting is ASTM 4956.01 compliant.
- In high wind areas please use sand bags.
- Accommodates two warning lights.

PSST Breakaway Base  
14 gauge weight: 13.2 lbs.

TD8400 Base  
Weight: 35 lbs.  
Height: 4 inches

PSST Base with Welded Socket  
14 gauge weight: 10.8 lbs.

