

**Series:
V01000 & V01300**

**Submersible Dewatering Pumps
2" NPT Female Discharge**



**Series:
V01000
0.75hp**

**V01300
1.0hp**



V-Power pumps are compact, lightweight powerful Portable Electric Submersible Pumps. They are whisper quiet and will perform in any position. V-Power pumps can be staged in series for higher head applications.

The V-Power in-line design assures maximum heat transferred to the pumped liquid. V-Power pumps can operate in up to 140°F (60°C) temperature water. V-Power design provides the coolest operating motor for maximum life.

Consult the factory prior to pumping fluids other than water for professional instructions.

**Vacuum Pressure Impregnation
"VPI" Sealed Insulation System**

VPI motor enhancement system was developed to greatly extend the winding life expectancy of an electric motor. The motor stator is loaded into a pressure vessel and immersed in the specialty selected varnish.

All gas pockets located within the stator are evacuated under vacuum. The varnish is drawn into the stator core, completely occupying all voids in the winding. Following a series of processes, ending in a controlled bake, the winding is 100% impregnated and sealed.

| | |
|-------------------------------|---|
| DISCHARGE CASE | Aluminum, Hard Anodized |
| DIFFUSER | Aluminum, Hard Anodized |
| SUCTION CASE | Aluminum, Hard Anodized, with wear resitant polyurethane liner |
| FRAME & OUTER CASE | Aluminum, Hard Anodized |
| PUMP SHAFT | Stainless Steel |
| IMPELLER | Polyurethane |
| HARDWARE | Stainless Steel |
| O-RINGS | Buna-N |
| SEAL | Tandem mechanical, Oil lubricated |
| INBOARD | Material: Rotating Face - Carbon Stationary Face - Ceramic Elastomer - Buna-N Hardware - 300 Series Stainless |
| OUTBOARD | Material: Rotating Face - Silicon Carbide Stationary Face - Silicon Carbide Elastomer - Viton® Hardware - 300 Series Stainless |
| STRAINER | Stainless Steel, 3/16" Holes |
| UPPER BEARNG | Single Row, Shielded, Ball Lubrication: Prelubricated high-temperature grease Load: Radial |
| LOWER BEARING | Single Row, Shielded, Ball Lubrication: Prelubricated high-temperature grease Load: Radial & Thrust |
| CORD ENTRY | 25 Ft. with Strain Relief and Pressure Grommet for Sealing |
| MOTOR | Insulation: Class F |
| CONTROL | NEMA 3R Rainproof |



| MODEL | POWER CORD WEIGHT | CONTROL BOX WEIGHT | PUMP ONLY WEIGHT | SHIPPING WEIGHT |
|--------|-------------------|--------------------|------------------|-----------------|
| 3/4 hp | 4.4 lbs | 8.8 lbs | 24.3 lbs | 44 lbs |
| 1 hp | 4.4 lbs | 8.8 lbs | 26.5 lbs | 48 lbs |

VPI is greatly superior to the "dip and bake" method which may provide only 50% to 70% of effective insulation leaving voids and air pockets. VPI provides 100% solid mass structure which provides the greatest mechanical strength and a cooler running motor due to superior heat dissipation.



Series: V01000 & V01300

Submersible Dewatering Pumps 2" NPT Female Discharge



V01011 Series

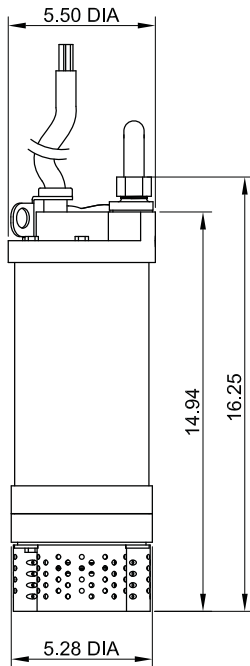

V01311 Series

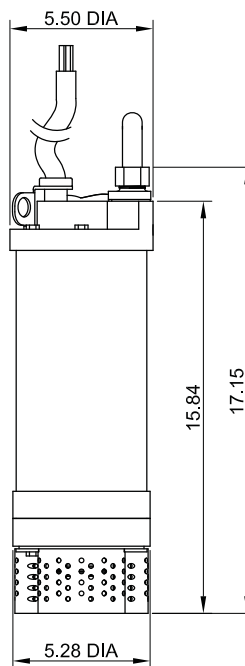

V01311SC Series

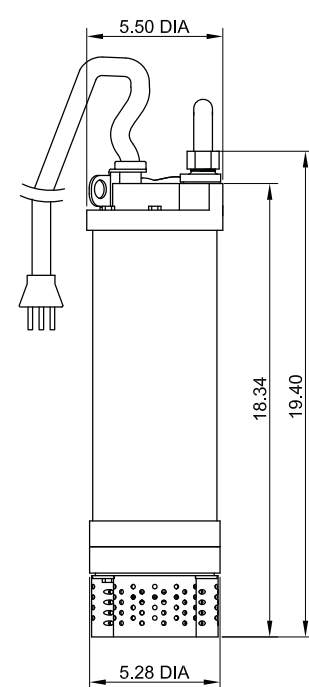

| MODEL No. | HP | VOLT/PH | Hz | RPM | NEMA START CODE | FULL LOAD AMPS | LOCKED ROTOR AMPS | CORD SIZE | CORD TYPE | MAX CORD LENGTH (FT) |
|-------------------------------------|-----|---------|----|------|-----------------|----------------|-------------------|-----------|-----------|----------------------|
| W/ NEMA 3R RAINPROOF CONTROL | | | | | | | | | | |
| V01011 | .75 | 115/1 | 60 | 3450 | G | 11.0 | 36.2 | 14/4 | SOW | 100 |
| V01012 | .75 | 230/1 | 60 | 3450 | G | 5.8 | 18.1 | 14/4 | SOW | 350 |
| V01032 | .75 | 230/3 | 60 | 3450 | J | 3.6 | 15.0 | 14/4 | SOW | 700 |
| V01034 | .75 | 460/3 | 60 | 3450 | J | 1.8 | 7.5 | 14/4 | SOW | 2800 |
| V01311 | 1.0 | 115/1 | 60 | 3450 | D | 15.0 | 42.0 | 14/4 | SOW | 90 |
| V01311SC | 1.0 | 115/1 | 60 | 3450 | D | 15.0 | 42.0 | 14/4 | SOW | 90 |
| V01312 | 1.0 | 230/1 | 60 | 3450 | D | 7.5 | 22.0 | 14/4 | SOW | 300 |
| V01332 | 1.0 | 230/3 | 60 | 3450 | G | 4.3 | 15.0 | 14/4 | SOW | 650 |
| V01334 | 1.0 | 460/3 | 60 | 3450 | G | 1.9 | 7.5 | 14/4 | SOW | 2700 |

Note: V01311SC offers self contained capacitors eliminating the need for an external control box.

IMPORTANT APPLICATION INFORMATION !



1) FOR THOSE APPLICATIONS SPECIFIED AS CLASS I DIVISION II HAZARDOUS LOCATIONS THIS PUMP AND CONTROL SUPPLIED ARE NOT APPROPRIATE FOR HAZARDOUS LOCATIONS.

2) INSTALLATIONS SUCH AS DECORATIVE WATER FEATURES MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE ANSI/NFPA 70. THIS PUMP IS NOT INTENDED FOR USE IN RECREATIONAL WATER PARKS, SWIMMING POOLS, OR INSTALLATIONS IN WHICH HUMANS ARE IN CONTACT WITH THE PUMPED FLUID.

Represented By WCT Products, Inc. • 800-928-7763 • wctproducts.com

**Series:
V01000 & V01300**


**Submersible Dewatering Pumps
2" NPT Female Discharge**

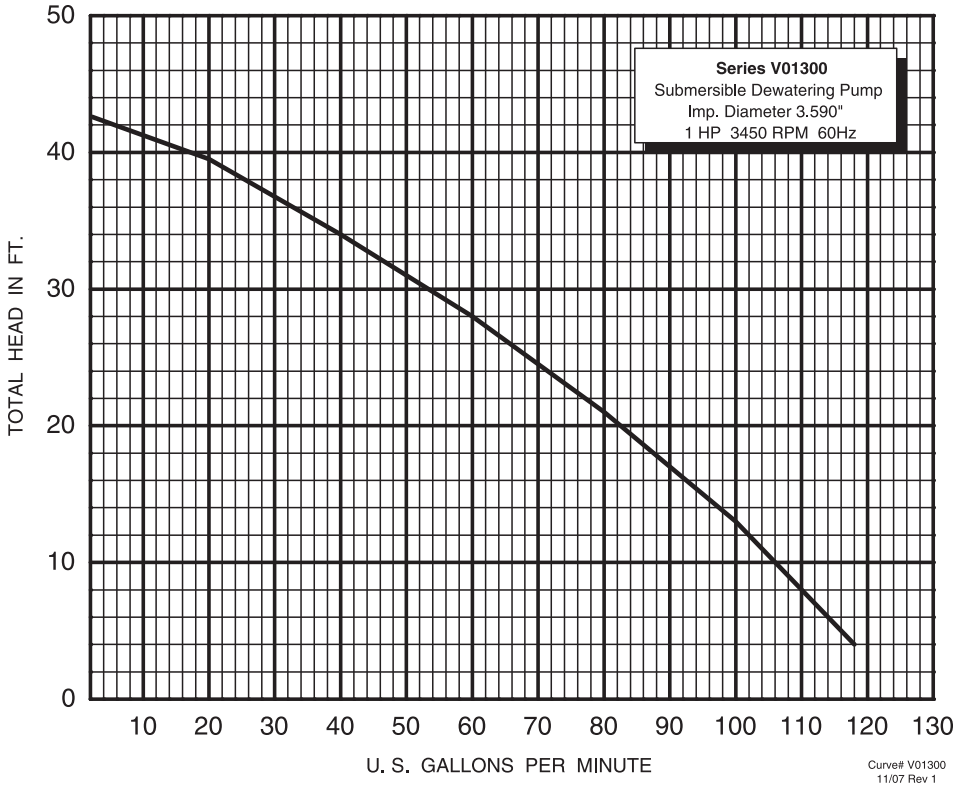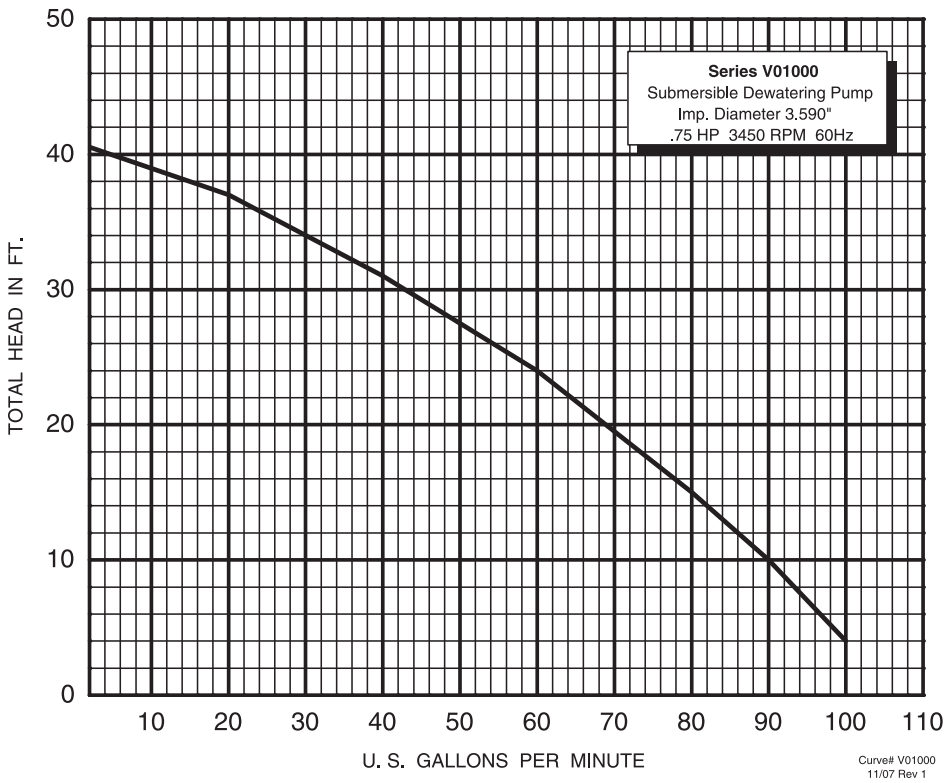

Series:
V01000 & V01300

Submersible Dewatering Pumps
2" NPT Female Discharge

Control Box (1PH) 0.75-1.0Hp

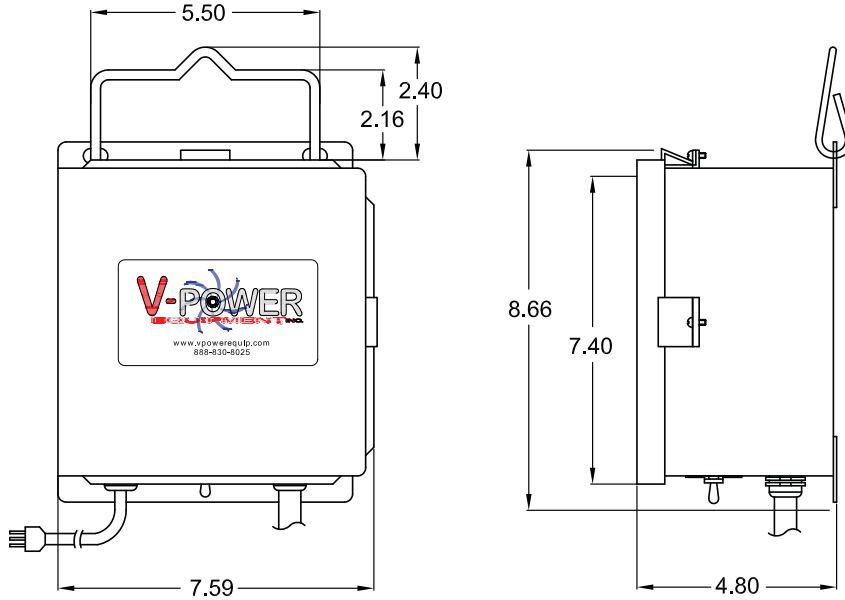

NEMA 3R RAINPROOF CONTROL

| Pump P/N: | Control P/N |
|-----------|-------------|
| V01011 | V101811 |
| V01012 | V101812 |
| V01311 | V101811 |
| V01312 | V101812 |

Control Box (3PH) 0.75-1.0Hp

