




VIVAX
METROTECH

Type-B Skid

Technical Specifications V1.2

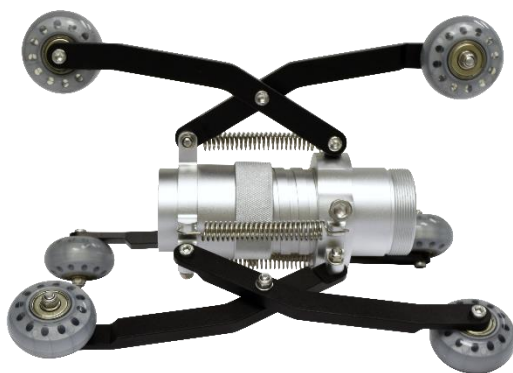

Type-B Skid



Light Kit

Worldwide Locations

World Headquarters, United States of America

Vivax-Metrotech Corporation

3251 Olcott Street, Santa Clara, CA 95054, USA

T/Free : 1-800-446-3392

Tel : +1-408-734-3880

Fax : +1-408-734-1415

Website : www.vivax-metrotech.com

Email : SalesUSA@vxmt.com

Central/South America and the Caribbean

Ventas para América Latina

3251 Olcott Street, Santa Clara, CA 95054, USA

T/Free : 1-800-446-3392

Tel : +1-408-734-3880

Fax : +1-408-743-5597

Website : www.vivax-metrotech.com

Email : LatinSales@vxmt.com

Canada

Vivax Canada, Inc.

41 Courtland Ave Unit 8, Vaughan, ON L4K 3T3, Canada

Tel : +1-289-846-3010

Fax : +1-905-752-0214

Website : www.vivax-metrotech.ca

Email : SalesCA@vxmt.com

United Kingdom

Vivax-Metrotech Ltd.

Unit 1, B/C Polden Business Centre, Bristol Road,
Bridgwater, Somerset, TA6 4AW, UK

Tel : +44(0)1793 822679

Website : www.vivax-metrotech.co.uk

Email : SalesUK@vxmt.com

France

Vivax-Metrotech SAS

Technoparc - 1 allée du Moulin Berger, 69130 Ecully,
France

Tel : +33(0)4 72 53 03 03

Fax : +33(0)4 72 53 03 13

Website : www.vivax-metrotech.fr

Email : SalesFR@vxmt.com

Germany

Metrotech Vertriebs GmbH

Am steinernen Kreuz 10a
D-96110 Schesslitz

Tel : +49 954 277 227 43

Website : www.vivax-metrotech.de

Email : SalesEU@vxmt.com

China

Vivax-Metrotech (Shanghai) Ltd.

Building 10, Lane 1158 Zhongxin Rd.,
Songjiang District, Shanghai, China, 201615

Tel : +86-21-5109-9980

Website : www.vivax-metrotech.com

Email : SalesCN@vxmt.com.cn

Type-B Skid

A. Typical Applications

Item	Parameter
Description	Adjustable Centering Skid for the D34 and D46 Series Cameras (When used with 12mm pushrod reels)

B. Characteristics

Item	Parameter
Construction	- Base: Aluminum - Arms: Anodized aluminum - Wheels: Polyurethane - Hardware: Stainless steel
Weight	2.65lbs (1.2kg)
Dimensions	- Contracted: 6.9" (175mm) x 10-3/4" (273mm) - Fully Expanded: 13.42" (340mm) X 9-3/4" (247.6mm)
Target Line Size	8 to 15 inches / 20 to 38cm

C. Operational

Item	Parameter
Operating Dimensions	- Skid minimum diameter: 8"/20.3cm - Skid minimum length: 11"/27.9cm - Skid maximum diameter: 12"/30.4cm - Skid maximum length: 10"/25.4cm

Type-B Light Kit

D. Typical Applications

Item	Parameter
Description	To provide additional lighting when used with the Type-B Skid
Materials	- Base: Polyoxymethylene - Window: Polycarbonate

E. Characteristics

Item	Parameter
Power Source	3 X Alkaline AA Batteries
Battery Life	2 Hours
Sealing Rating	IP68
Luminous Intensity	6000 MCD

Weight	1lb (0.42kg)
--------	--------------

All products are designed and manufactured under ISO 9001:2015.

Disclaimer: All product availability or product accessory information is subject to change without notice.